

Name _____ **Group** _____ **Mark:** **/70**

1 Programming languages consist of three basic programming constructs. For each construct, state its name and give a working example.

Construct

1:

.....

Example:

.....

.....

.....

.....

.....

.....

.....

Construct

2:

.....

Example:

.....

.....

.....

.....

.....

.....

.....

Construct

3:

.....

Example:

.....

.....

.....

.....

.....

.....

..... **[6]**

2* A software company is going to write a policy on its use of variables when writing programs. The policy will cover the use of local and global variables and variable naming rules and conventions. Discuss the content of this policy and why it is required. **[9]**

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

3 (a) A software development company is planning to produce a bespoke monitoring system for a factory which produces hazardous chemicals. One testing strategy is whitebox testing.

State the name of **three** other testing strategies that the company could use.

1

2

3 **[3]**

(b) The company decide to use whitebox testing. Justify why whitebox testing is used in this case.

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

..... **[3]**

(c) A temperature control system monitors and regulates temperature by switching a heater

- The heater is turned off when the sensor reading is 97.500.
- The heater is turned on when the sensor reading is 95.000.
- The red warning light is on when the sensor reading is 98.100 or above.
- The amber warning light is on when the sensor reading is outside the range 95.000 to 97.500 (inclusive), and the red warning light is **not** on.

Sensor Value	Output	On/Off
94.999 Amber light on	94.999 Amber light on	94.999 Amber light on
95.000	Heater	
	Amber light	
97.500	Heater	
	Amber light	
97.501	Amber Light	
98.099	Amber light	
	Red light	
98.100	Amber light	
	Red light	

[4]

.....

[illegible]

(c) The target integer 8 exists in a list of integers 1, 4, 6, 9, 8, 12, 15 but is not found during a binary search. There are no errors in the code.

.....


.....

.....

[illegible]

(d) A stack, in shared memory, is being used to pass a single variable length ASCII string

between two sub-systems. The string is placed in the stack one character at a time in reverse order with the last byte holding the number of characters pushed i.e the text "SILVER" would be held in the stack as:

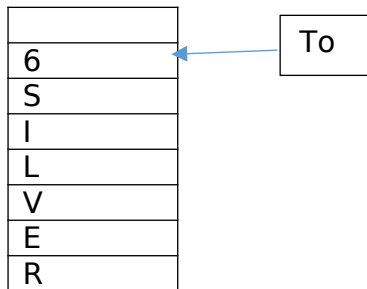

Use pseudocode to write a procedure that will take a text string passed to it and push it to the stack in the format defined above. You may assume any given input will fit in the stack.

[illegible]

..... [6]

5 A car racing team uses a car simulator to test their drivers in a range of cars on different race tracks.

(a) The car simulator uses an abstraction of the real car and race track. Identify **two** ways in which the simulator could use abstraction.

1

.....

2

.....

..... **[2]**

(b) Identify **three** inputs that will be required to configure the initial conditions for running the simulation.

1

2

3

..... **[3]**

6 (a) A programmer is going to design a procedure that will prompt for and receive two values, A and B. The procedure will then compare them. The procedure will also write a suitable message to a file on disk depending on whether:

- the values are the same
- A is less than B, or
- B is less than A.

Use pseudocode to write the procedure.

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

(b) The code below uses a procedure:

Explain why this program outputs Sam rather than Hello Sam.

(c) Explain the advantages of writing an application using a modular approach.

[illegible]

.....
..... **[6]**

7 Given the following pseudocode:

```
d = 5
if ((a > b) OR (b >= c)) then
    if ((c < a ) XOR (c < b)) then    // Check to see if one or the other
                                    // comparisons are TRUE, but not both
        d = 15
    else
        d = 16
    endif
else
    d = 14
endif
print(d)
```

(a) State the value of d if a=42, b=41 and c=42

(b) State the value of d if a=42, b=36 and c=4

(c) State the value of d if a=42, b=36 and c=36

(d) Give **one** potential value of b if the output value of a=42, c=44 and d=14.

[4]